




TIN ROOF

BY RITA FISHEL
CLPRFI020



cutting edge. Also align the fabric with the 6 1/2" lines on the ruler. Again, cut along the 45° angle edge of the ruler through the layers of fabric.

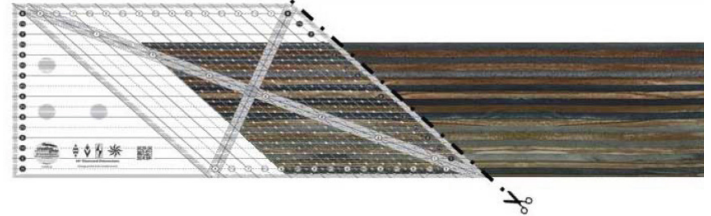

-You should get four diamonds per strip. Cut a total of 48 diamonds.

-Note: Cutting the fabric with the wrong sides together has given you 24 sets of mirror image diamonds. Separate these into two groups, "A" pieces that were cut face up, and "B" pieces that were cut face down.

CONSTRUCTION:

-Sew 6" "A" diamonds together end-to-end to make one row. Make 4 rows.

(this image is the same as first image under construction heading)

-Repeat with the "B" diamonds, making 4 rows. Be sure to offset the sharp points at the ends of the 45° triangles to get straight seams. Press seams open.



-Sew one black setting triangle to each end of the strip to make straight cuts at each end.

-Sew all 8 rows together as shown.

STRIPED FABRIC REQUIREMENT - 2 1/2 YARDS
(WAS 3 YARDS)

CUTTING INSTRUCTIONS:

STRIPE FABRIC

-Cut (12) 6 1/2" x WOF strips (was 16 strips)

CUT THE STRIPED DIAMONDS - Instructions have been changed to the following:

-Begin with the 45° angle edge of the Creative Grids® Diamond Dimensions ruler along the far right edge of your striped 6 1/2" strip. Cut along the 45° angle line.

(the first image is still the same)

-Referring to the ruler instructions, flip the fabric around so that the 45° cut edge lines up under ruler with 45° line running parallel to the